



# PMV 50 Microwave Moisture Analyzer

Advanced solution for measurement of samples with high moisture content



Drying programs and finish modes database



Drying process visualization



Chamber for moisture content determination of special design



5.7" colour touch screen assuring intuitive operation

## Features

- Moisture content analysis
- Drying modes
- GLP procedures
- Replaceable unit
- Microwave drying
- Dry mass determination
- Proximity sensors
- Drying process visualization
- Multilingual menu
- Samples drying

## Characteristics

### Microwave Moisture Content Measurement

Microwave moisture analyzers require much less time for drying of weighed materials. This solution is an excellent choice for measuring products containing significant amounts of moisture, ie... dairy products, meat, fish, syrups, creams, liquid resin.

### Ultra-Short Drying Time

The PMV 50 moisture analyzer enables the user to significantly reduce drying time for samples. Depending on the type and mass of the sample, the process takes 1 to 10 minutes whereas drying using the traditional halogen moisture analyzer takes 5 to 40 minutes.

### Uniform Heating of the Sample

In contrast to traditional moisture analyzers where the heat is emitted from the side of a heating element, the PMV 50 moisture analyzer heats the whole sample's volume due to the use of 90 mm glass fiber filter.

### Temperature Sensor

The PMV 50 microwave moisture analyzer is equipped with a temperature sensor that enables the user to monitor device power, in order to prevent overheating during the process. The preset microwave power level is displayed on the indicator throughout the drying procedure.

### Complex Databases

Measuring processes are supported by databases with numerous data management options. Expanded 32 GB memory enables saving and storing advanced reports and time and statistical graphs.

### Verification of Operation

When purchasing the PMV 50 moisture analyzer a sample of sodium chloride 10 is provided by the manufacturer.

# Technical Specifications


	PMV 50	QTY
Maximum capacity [Max]	50 g	
Readability [d]	0.1 mg	
Tare range	-50 g	
Maximum sample weight	50 g	
Moisture content readability	0.05%	
Moisture content repeatability	0.05% (ca. 1 g sample)	
Adjustment	external	
Display	5.7" colour, resistive touch screen	
Keypad	8 keys	
Heating module	microwawe radiation emitter	
Databases	10	
Finish mode	manual, automatic, time-defined, user-defined	
Touch-free operation	2 programmable proximity sensors	
Additional functions	sample traceability, drying process graph	
USB-A	2	
RS 232	1	
Wireless connection	802.11 b/g/n	
Ethernet	10 / 100 MBit	
IN/OUT	4 × IN, 4 × OUT	
Power supply	230 V 50Hz AC	
Power consumption	max 800 W (during drying)	
Heating module power	max 800 W	
Operating temperature	+10 ÷ +40 °C	
Atmospheric humidity*	40 ÷ 80%	
Transport and storage temperature	-20 ÷ +50 °C	
Sample holder dimensions	ø 90 mm glass fibre filter	
Weighing device dimensions	430 × 305 × 280 mm	
Net weight	20 kg	
Gross weight	25 kg	
Packaging dimensions	400 × 400 × 700 mm	

\* non-condensing conditions

## NOTES

**DOWNLOAD FORM FIRST TO SUBMIT QUOTE REQUEST**

## Dimensions

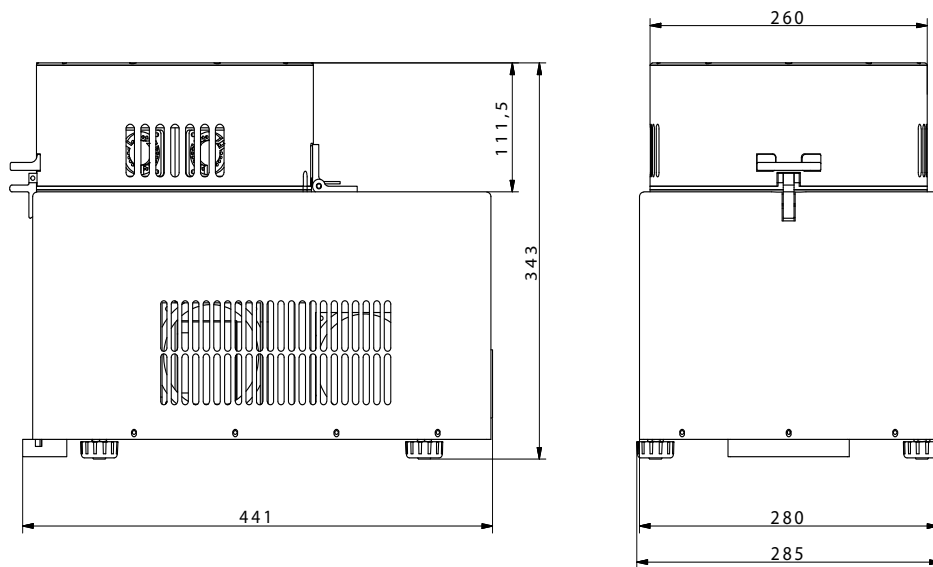

## Accessories

### Weighing Tables

- antivibration tables for laboratory balances

### Special Purpose Weighing

- water vapour permeability determination set

### Ambient Conditions

GT105K-12/Z control thermometer

### Peripheral Devices

- dot matrix Epson printer
- barcode scanners

### Consumables

- disposable pans

### Cables, Converters

- P0108: RS 232 cable (balance-computer)
- P0167: RS 232 cable (balance-computer)
- P0151: RS 232 cable (balance - Epson printer)

## Dedicated Software

### R-LAB

- collecting measurements
- carrying out statistical analysis of measurements
- customized graphs and reports

### E2R Moisture Analyzer

- drying programs synchronization
- online preview of the drying process
- drying processes record
- reporting of single and group drying operations

### RAD KEY

- Establishing cooperation between a weighing instrument and a computer

### RADWAG Remote Desktop

- remote operation via computer, mobile phone or tablet
- sending text messages
- version for Windows 10 and Android systems

### Radwag Development Studio

- presentation of functions (and subfunctions) of communication protocol (Common Communication Protocol)
- possibility of connection with weighing equipment on which each function is carried out,
- library with mass control, contained within the development environment
- complete documentation of the communication protocol
- set of user manuals for different solutions addressed for programmers employed in companies using RADWAG-manufactured weighing equipment

### LabView Driver

- operation of RADWAG balances in LabView environment